



15F2698

# Maintenance/Crew Stand



Building Quality Ground Support Products Since 1961

- 500 lb platform capacity
- Hydraulically elevates 10' to 19'. Hand actuated hydraulic pump with two 2" dia. x 35" stroke lift cylinders, plus an air over hydraulic system
- 48" x 108" main platform standard, featuring non-slip steel grip- strut floor and sliding handrails
- Non-slip steel grip-strut steps, 50" wide, 9 1/2" deep, variable rise 0" to 10"
- Fixed front and swivel rear casters provide ease in maneuverability.
- Hand adjustable screw jacks on each end for stability
- Parallelogram of welded tubular steel and cross braces automatically keeps platform and steps level with ground

# CLYDE


Clyde Machines  
P.O. Box 194  
1150 Hwy 55 N.  
Glenwood, MN 56334 USA  
(320) 634-4504  
(320) 634-4506 Fax

[www.clydemachines.com](http://www.clydemachines.com)

**15F2698**

# Maintenance/Crew Stand

- 4" O.D. non-marring rubber bumper at the leading edge of the platform
- Hydraulic restrictors in case of pressure failure
- Safety strut with pin

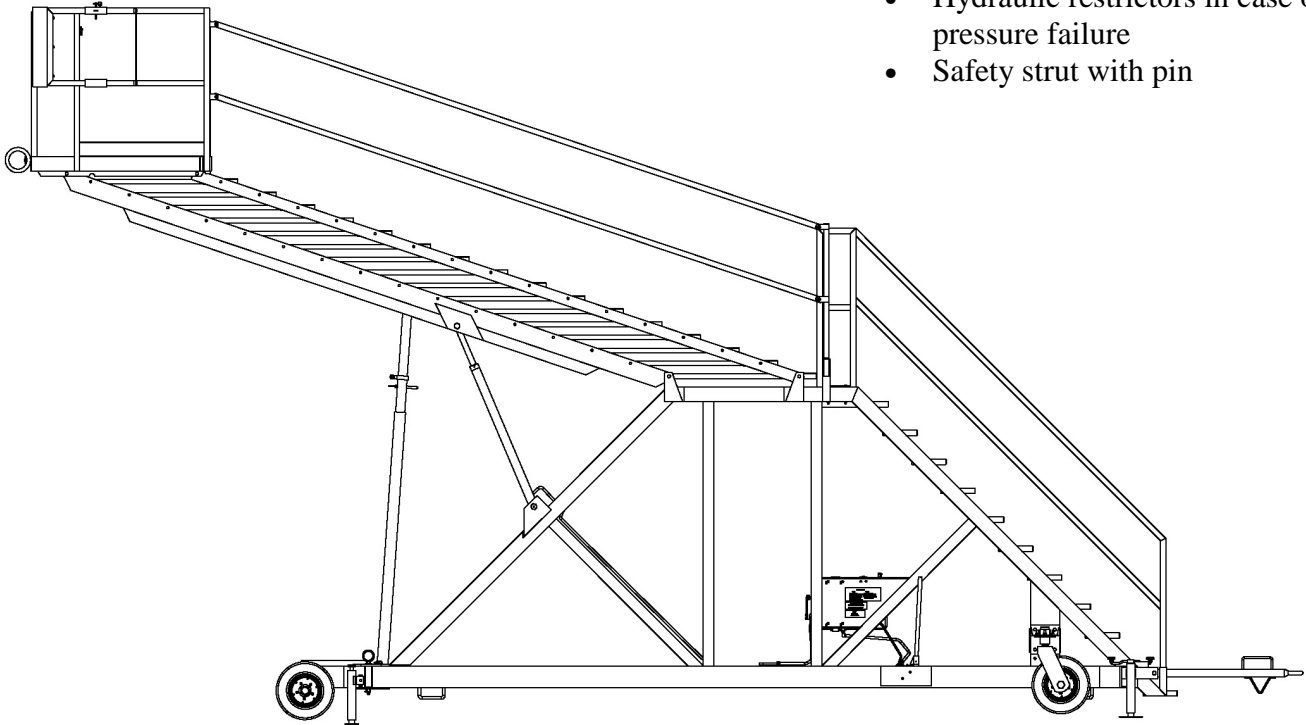

## Shipping Information

- Dimensions:
  - Length - 336"
  - Width - 96"
  - Height 119"
  - Platform Height - 10' - 19'
  - Weight - 3,500 lbs

**CLYDE**

**Clyde Machines**  
P.O. Box 194  
1150 Hwy 55 N.  
Glenwood, MN 56334 USA  
(320) 634-4504  
(320) 634-4506 Fax

[www.clydemachines.com](http://www.clydemachines.com)