



15F3357

Windshield Stand



Building Quality Ground Support Products Since 1961

- 750 lb. platform capacity
- Adjustable to any height within its 10' to 19' platform floor range
- Double acting hydraulic hand pump with two 2" dia. x 35" stroke lift cylinders, plus an air over hydraulic system
- Hydraulic restrictors in case of pressure failure
- Safety strut with pin
- Non-slip self-cleaning steps with non-slip steel tread grip platform floor
- 72" x 106" main platform, featuring sliding foldable handrails
- 9 3/4 hex driven acme thread extendable planks with 20" of travel and swivel 4" O.D. non-marring bumpers
- Two safety lanyard D-rings move for/aft with toe plates.
- Fixed front and swivel rear casters with 16" dia. solid tires
- Hand adjustable screw jacks on each corner for stability
- Base, stairs, and platform stay parallel at any height position
- Durable powder coat finish


CLYDE

Clyde Machines
P.O. Box 194
1150 Hwy 55 N.
Glenwood, MN 56334 USA
(320) 634-4504
(320) 634-4506 Fax

www.clydemachines.com

15F3357

Windshield Stand

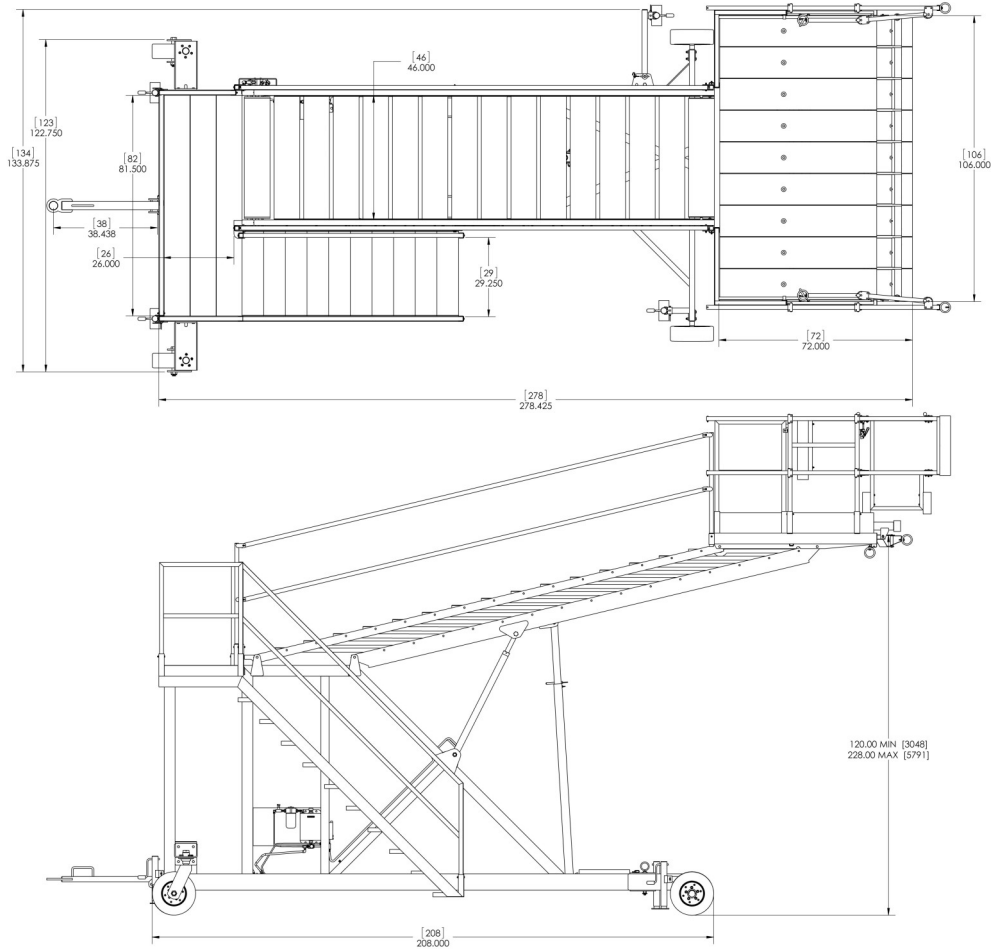

Shipping Information

- Dimensions:
 - Weight - 5,200 lbs.
 - Frame only Length 252", with basket 319"
 - Width - 101.5"
 - Height - 112"

CLYDE

Clyde Machines
P.O. Box 194
1150 Hwy 55 N.
Glenwood, MN 56334 USA
(320) 634-4504
(320) 634-4506 Fax

www.clydemachines.com